

Enhanced public key security for the McEliece cryptosystem

Marco Baldi¹, Marco Bianchi¹, Franco Chiaraluce¹,
Joachim Rosenthal², and Davide Schipani²

¹Università Politecnica delle Marche, Ancona, Italy,
{m.baldi,m.bianchi,f.chiaraluce}@univpm.it

²University of Zurich, Zurich, Switzerland,
{rosenthal,davide.schipani}@math.uzh.ch

Abstract

This paper studies a variant of the McEliece cryptosystem able to ensure that the code used as the public key is no longer permutation-equivalent to the secret code. This increases the security level of the public key, thus opening the way for reconsidering the adoption of classical families of codes, like Reed-Solomon codes, that have been longly excluded from the McEliece cryptosystem for security reasons. It is well known that codes of these classes are able to yield a reduction in the key size or, equivalently, an increased level of security against information set decoding; so, these are the main advantages of the proposed solution. We also describe possible vulnerabilities and attacks related to the considered system, and show what design choices are best suited to avoid them.

Keywords: McEliece cryptosystem, Niederreiter cryptosystem, error correcting codes, Reed-Solomon codes, public key security.

1 Introduction

The McEliece cryptosystem [8] is one of the most promising public-key cryptosystems able to resist attacks based on quantum computers. In fact, differently from cryptosystems exploiting integer factorization or discrete logarithms, it relies on the hardness of decoding a linear block code without any visible structure [3].

The material in this paper was presented in part at the Seventh International Workshop on Coding and Cryptography (WCC 2011), Paris, France, April 2011. The Research was supported in part by the Swiss National Science Foundation under grant No. 132256.

The original McEliece cryptosystem adopts the generator matrix of a binary Goppa code as the private key, and exploits a dense transformation matrix and a permutation matrix to disguise the secret key into the public one. It has resisted cryptanalysis for more than thirty years, since no polynomial-time attack to the system has been devised up to now; however, the increased computing power and the availability of optimized attack procedures have required to update its original parameters [4].

The main advantage of the McEliece cryptosystem consists in its fast encryption and decryption procedures, which require a significantly lower number of operations with respect to alternative solutions (like RSA). However, the original McEliece cryptosystem has two main disadvantages: low encryption rate and large key size, both due to the binary Goppa codes it is based on. When adopting Goppa codes, a first improvement is obtained through the variant proposed by Niederreiter [11], which uses parity-check matrices instead of generator matrices.

A significant improvement in both the encryption rate and the key size would be obtained if other families of codes could be included in the system, allowing a more efficient code design and a more compact representation of their matrices. In particular, the use of Reed-Solomon (RS) codes could yield significant advantages. In fact, RS codes are maximum distance separable codes, which ensures they achieve maximum error correction capability under bounded-distance decoding. In the McEliece system, this translates into shorter keys for the same security level, or a higher security level for the same key size, with respect to binary Goppa codes (having the same code rate). In fact, Goppa codes are subfield subcodes of generalized RS codes and the subcoding procedure makes them less efficient than RS codes. However, this also makes them secure against key recovering attacks, while the algebraic structure of RS codes, when exposed in the public key (also in permuted form), makes them insecure against attacks aimed at recovering the secret code [18].

Many attempts of replacing Goppa codes with other families of codes have exposed the system to security threats [14], [20], and some recent proposals based on Quasi-Cyclic and Quasi-Dyadic codes have also been broken [19]. Low-Density Parity-Check (LDPC) codes, in principle, could offer high design flexibility and compact keys. However, also the use of LDPC codes may expose the system to severe flaws [10], [12]. Nevertheless, it is still possible to exploit Quasi-Cyclic LDPC codes to design a variant of the system that is immune to any known attack [1].

The idea in [1] is to replace the permutation matrix used in the original McEliece cryptosystem with a dense transformation matrix. The transformation matrix used in [1] is a sparse matrix and its density must be chosen as a trade-off between two opposite effects: i) increasing the density of the public code parity-check matrix so that it is too difficult to search for low weight codewords in its dual code and ii) limiting the propagation of the intentional errors so that they are still correctable by the legitimate receiver. The advantage of replacing the permutation with a more general transformation is that the code used as the public key is no longer permutation equivalent to the secret code.

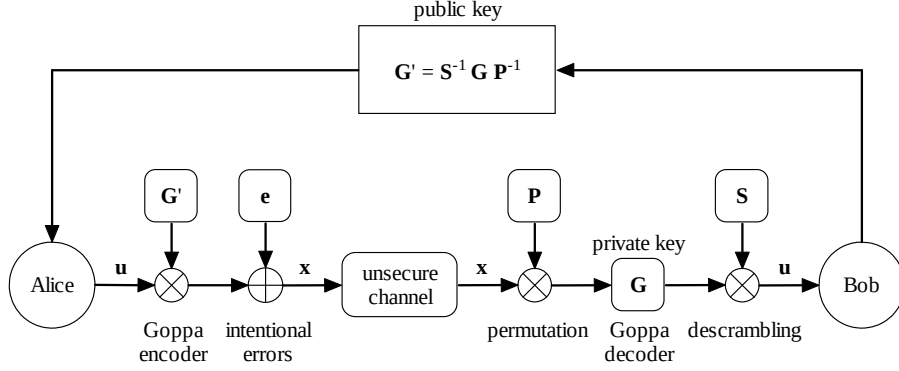


Figure 1: The McEliece cryptosystem.

This increases the security of the public key, as it prevents an attacker from exploiting the permutation equivalence when trying to recover the secret code structure.

We elaborate on this approach by introducing a more effective class of transformation matrices and by generalizing their form also to the non-binary case. The new proposal is based on the fact that there exist some classes of dense transformation matrices that have a limited propagation effect on the intentional error vectors. The use of these matrices allows to better disguise the private key into the public one, with a controlled error propagation effect. So, we propose a modified cryptosystem that can restore the use of advantageous families of codes, as RS codes, by ensuring increased public key security.

2 Description of the cryptosystem

The proposed cryptosystem takes as its basis the classical McEliece cryptosystem, whose block scheme is reported in Figure 1, where u denotes a clear text message and x its associated ciphertext. The main components of this system are:

- A private linear block code generator matrix G
- A public linear block code generator matrix G'
- A secret scrambling matrix S
- A secret permutation matrix P
- A secret intentional error vector e

As for the original system, the proposed cryptosystem can be implemented in the classical McEliece form or, alternatively, in the Niederreiter form. In both cases, the main element that differentiates the proposed solution from the

original cryptosystem is the replacement of the permutation matrix $\mathbf{P}$ with a dense transformation matrix $\mathbf{Q}$, whose design is described next.

2.1 Matrix $\mathbf{Q}$

The matrix $\mathbf{Q}$ is a non-singular $n \times n$ matrix having the form

$$\mathbf{Q} = \mathbf{R} + \mathbf{T}, \quad (1)$$

where $\mathbf{R}$ is a dense $n \times n$ matrix and $\mathbf{T}$ is a sparse $n \times n$ matrix. The matrices $\mathbf{R}$, $\mathbf{T}$ and $\mathbf{Q}$ have elements in $\mathbb{F}_q$, with $q \geq 2$.

The matrix $\mathbf{R}$ is obtained starting from two sets, $\mathcal{A}$ and $\mathcal{B}$, each containing w matrices having size $z \times n$, $z \leq n$, defined over $\mathbb{F}_q$: $\mathcal{A} = \{\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_w\}$, $\mathcal{B} = \{\mathbf{b}_1, \mathbf{b}_2, \dots, \mathbf{b}_w\}$. We also define $\mathbf{a} = \sum_{i=1}^w \mathbf{a}_i$. The matrices in $\mathcal{A}$ and $\mathcal{B}$ are secret and randomly chosen; then, $\mathbf{R}$ is obtained as:

$$\mathbf{R} = \begin{bmatrix} \mathbf{a}_1 \\ \mathbf{a}_2 \\ \vdots \\ \mathbf{a}_w \end{bmatrix}^T \cdot \begin{bmatrix} \mathbf{b}_1 \\ \mathbf{b}_2 \\ \vdots \\ \mathbf{b}_w \end{bmatrix}, \quad (2)$$

where ^{T} denotes transposition. Starting from (2), we make some simplifying assumptions, aimed at reducing the amount of secret data that is needed to be stored. In fact, for the instances of the proposed cryptosystem we consider, we will focus on two cases, both with $w = 2$: i) $\mathbf{a}_1 = \mathbf{a}$, $\mathbf{a}_2 = \mathbf{0}$ and ii) $\mathbf{b}_2 = \mathbf{1} + \mathbf{b}_1$, where $\mathbf{0}$ and $\mathbf{1}$ represent, respectively, the all-zero and the all-one $z \times n$ matrix. In both these cases, there is no need to store nor choose the matrix $\mathbf{b}_2$. For this reason, in order to simplify the notation, we will replace $\mathbf{b}_1$ with $\mathbf{b}$ in the following. This obviously does not limit the applicability of the general form (2) of the matrix $\mathbf{R}$.

Concerning the choice of the matrix $\mathbf{T}$, we denote by $\mathbf{\Pi}_i$ a generalized permutation matrix, that is, a matrix having only one non-zero element in each row and in each column, whose value is selected among the $q - 1$ non-zero elements of $\mathbb{F}_q$. The matrix $\mathbf{T}$ is then obtained as the sum of $m \geq 1$ generalized permutation matrices, chosen at random:

$$\mathbf{T} = \mathbf{\Pi}_1 + \mathbf{\Pi}_2 + \dots + \mathbf{\Pi}_m. \quad (3)$$

In the system we propose, the matrix $\mathbf{Q}$, having the form (1), replaces the permutation matrix $\mathbf{P}$ that is used in the original McEliece cryptosystem and in its Niederreiter version. As we will see in the following, both these versions exploit an intentional error vector $\mathbf{e} = [e_1, e_2, \dots, e_n]$, randomly generated, having a predetermined weight t , like in the classical cryptosystem. Each error vector might then be subject or not to additional constraints, depending on the implementation we use, as shown later. Let us suppose now that a constraint is imposed to the vector $\mathbf{e}$ in the form:

$$\mathbf{a} \cdot \mathbf{e}^T = \mathbf{0}. \quad (4)$$

If we suppose that the matrix $\mathbf{a}$ is full rank, the number of constraints we impose on the intentional error vectors is equal to z . Obviously, in order to be implemented, this would require $\mathbf{a}$ to be disclosed as part of the public key, but, as we will see in the following, this, together with condition (4), may introduce a weakness in the system. This issue will be discussed next, together with the ways to avoid such a weakness.

For the moment, let us suppose that $\mathbf{a}$ is disclosed and that condition (4) is verified. As we will see in the following, for both versions of the cryptosystem it turns out that, during decryption, the matrix $\mathbf{Q}$ has a multiplicative effect on the intentional error vector $\mathbf{e}$. As a result, $\mathbf{e}$ is transformed into $\mathbf{e} \cdot \mathbf{Q} = \mathbf{e} \cdot (\mathbf{R} + \mathbf{T})$. If (4) holds, the contribution due to $\mathbf{R}$ becomes, for the two cases we focus on:

$$\mathbf{e} \cdot \mathbf{R} = \begin{cases} \mathbf{0}, & \text{if } \mathbf{a} = \mathbf{a}_1, \mathbf{a}_2 = \mathbf{0}, \\ \mathbf{e} \cdot \mathbf{a}_2^T \cdot \mathbf{1}, & \text{if } \mathbf{b}_2 = \mathbf{1} + \mathbf{b}. \end{cases} \quad (5)$$

So, in the former case, $\mathbf{e} \cdot \mathbf{Q}$ reduces to $\mathbf{e} \cdot \mathbf{T}$. In the latter case, instead, the legitimate receiver should know the value of $\mathbf{e} \cdot \mathbf{a}_2^T$ to remove the contribution due to $\mathbf{e} \cdot \mathbf{R}$. We will see in the following how this can be done.

When the result of $\mathbf{e} \cdot \mathbf{Q}$ can be reduced to $\mathbf{e} \cdot \mathbf{T}$, the use of the matrix $\mathbf{Q}$ as in (1) allows to amplify the number of intentional errors (at most) by a factor m . For $m = 1$, the required error correction capability is exactly the same as in the original McEliece and Niederreiter cryptosystems while, for $m > 1$, the limited error propagation effect can be compensated by using codes with a high error correction capability, as it occurs when adopting LDPC codes [1].

But the advantage of using the matrix $\mathbf{Q}$ is that it allows to disguise the private matrix of a code over $\mathbb{F}_q$ in a way that can be much stronger than what can be done by using a permutation matrix (as in the original McEliece system).

So, the proposed solution can help revitalizing previous attempts of using alternative families of codes in the McEliece system. A first idea is to reconsider the usage of RS codes over $\mathbb{F}_q$. In the following sections we will show that the attacks that have prevented their usage in the past cannot be directly applied to the new variant, so that it shall be considered secure against them.

2.2 McEliece version

In the McEliece version of the proposed system, Bob chooses his secret key as the $k \times n$ systematic generator matrix $\mathbf{G}$ of a linear block code over $\mathbb{F}_q$, able to correct t errors. He also chooses other two secret matrices: a $k \times k$ non-singular scrambling matrix $\mathbf{S}$ and the $n \times n$ non-singular transformation matrix $\mathbf{Q}$, defined as in (1). The public key is:

$$\mathbf{G}' = \mathbf{S}^{-1} \cdot \mathbf{G} \cdot \mathbf{Q}^{-1}. \quad (6)$$

So, in general, differently from the original McEliece cryptosystem, the public code is not permutation-equivalent to the private code.

Alice, after obtaining Bob's public key, applies the following encryption map:

$$\mathbf{x} = \mathbf{u} \cdot \mathbf{G}' + \mathbf{e}. \quad (7)$$

After receiving $\mathbf{x}$, Bob inverts the transformation as follows:

$$\mathbf{x}' = \mathbf{x} \cdot \mathbf{Q} = \mathbf{u} \cdot \mathbf{S}^{-1} \cdot \mathbf{G} + \mathbf{e} \cdot \mathbf{Q}, \quad (8)$$

thus obtaining a codeword of the secret code affected by the error vector $\mathbf{e} \cdot \mathbf{Q}$.

The special form we adopt for the matrix $\mathbf{Q}$ allows Bob to reduce $\mathbf{e} \cdot \mathbf{Q}$ to $\mathbf{e} \cdot \mathbf{T}$. Obviously, this is immediately verified when $\mathbf{e} \cdot \mathbf{R} = \mathbf{0}$, while it will be shown in Sections 3.2 and 3.3 how it can be achieved when $\mathbf{e} \cdot \mathbf{R} \neq \mathbf{0}$.

So, because of the limited error propagation effect that is due to $\mathbf{T}$, Bob is able to correct all the errors and get $\mathbf{u} \cdot \mathbf{S}^{-1}$, thanks to the systematic form of $\mathbf{G}$. He can then obtain $\mathbf{u}$ through multiplication by $\mathbf{S}$.

2.3 Niederreiter version

The Niederreiter version of the proposed cryptosystem works as follows. Bob chooses the secret linear block code over $\mathbb{F}_q$, able to correct t errors, by fixing its $r \times n$ parity-check matrix ($\mathbf{H}$), and obtains his public key as

$$\mathbf{H}' = \mathbf{S}^{-1} \cdot \mathbf{H} \cdot \mathbf{Q}^T, \quad (9)$$

where the scrambling matrix $\mathbf{S}$ is a non-singular $r \times r$ matrix and the transformation matrix $\mathbf{Q}$ is defined as in (1).

Alice gets Bob's public key, she maps the cleartext vector into a weight t error vector $\mathbf{e}$ and calculates the ciphertext as the syndrome $\mathbf{x}$ of $\mathbf{e}$ through $\mathbf{H}'$, according to

$$\mathbf{x} = \mathbf{H}' \cdot \mathbf{e}^T. \quad (10)$$

In order to decrypt $\mathbf{x}$, Bob first calculates $\mathbf{x}' = \mathbf{S} \cdot \mathbf{x} = \mathbf{H} \cdot \mathbf{Q}^T \cdot \mathbf{e}^T = \mathbf{H} \cdot (\mathbf{e} \cdot \mathbf{Q})^T$. The special form of $\mathbf{Q}$ allows Bob to reduce $\mathbf{e} \cdot \mathbf{Q}$ to $\mathbf{e} \cdot \mathbf{T}$. Obviously, this is immediately verified when $\mathbf{e} \cdot \mathbf{R} = \mathbf{0}$, while it will be shown in Sections 3.2 and 3.3 how it can be achieved when $\mathbf{e} \cdot \mathbf{R} \neq \mathbf{0}$.

So, he gets $\mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{e}^T$ and, due to the limited error propagation effect of $\mathbf{T}$, he is able to obtain $\mathbf{T}^T \cdot \mathbf{e}^T$ by performing syndrome decoding through the private linear block code. Then, he multiplies the result by $(\mathbf{T}^T)^{-1}$ and finally demaps $\mathbf{e}$ into its associated cleartext vector $\mathbf{u}$.

In order to reduce the public key size, the matrix $\mathbf{H}'$, defined by (9), can be put in systematic form. Let us divide $\mathbf{H}'$ into a left $r \times r$ matrix $\mathbf{H}'_l$ and a right $r \times k$ matrix $\mathbf{H}'_r$, i.e. $\mathbf{H}' = [\mathbf{H}'_l | \mathbf{H}'_r]$. We can suppose, without loss of generality, that $\mathbf{H}'_l$ is full rank and obtain the systematic form of $\mathbf{H}'$ as:

$$\mathbf{H}'' = (\mathbf{H}'_l)^{-1} \cdot \mathbf{H}'. \quad (11)$$

If $\mathbf{H}''$ is used as the public key, only its rightmost k columns are needed to be stored. When Alice uses $\mathbf{H}''$ for encryption, she obtains a public message $\mathbf{x}'' = \mathbf{H}'' \cdot \mathbf{e}^T$. Then, Bob must compute $\mathbf{x} = \mathbf{H}'_l \cdot \mathbf{x}''$ in order to get $\mathbf{x}$ as expressed by (10).

3 System design

In this section, we describe some critical aspects and possible weaknesses that must be carefully considered in the design of the proposed system.

3.1 Subcode vulnerability

When $\mathbf{a} = \mathbf{a}_1$ and $\mathbf{a}_2 = \mathbf{0}$, a possible vulnerability results from condition (4), since, in such a case, a subcode of the public code is exposed, that is permutation-equivalent to a subcode of the private code. In fact, if we refer to the Niederreiter version of the system, an attacker could consider the subcode generated by the following parity-check matrix:

$$\mathbf{H}_S = \begin{bmatrix} \mathbf{H}' \\ \mathbf{a} \end{bmatrix} = \begin{bmatrix} \mathbf{S}^{-1} \cdot \mathbf{H} \cdot \mathbf{Q}^T \\ \mathbf{a} \end{bmatrix} = \begin{bmatrix} \mathbf{S}^{-1} \cdot \mathbf{H} \cdot \mathbf{R}^T + \mathbf{S}^{-1} \cdot \mathbf{H} \cdot \mathbf{T}^T \\ \mathbf{a} \end{bmatrix}. \quad (12)$$

Each codeword $\mathbf{c}$ in the code defined by $\mathbf{H}_S$ must verify $\mathbf{a} \cdot \mathbf{c}^T = \mathbf{0}$. Due to the form of $\mathbf{R}$, this also implies $\mathbf{R}^T \cdot \mathbf{c}^T = \mathbf{0}$, so $\mathbf{H}_S$ defines a subcode of $\mathbf{H}'$ in which all codewords satisfy $\mathbf{S}^{-1} \cdot \mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{c}^T = \mathbf{0}$. Hence, the effect of the dense $\mathbf{R}$ is removed and, when $\mathbf{T}$ is a permutation matrix (that is, when $m = 1$), the subcode defined by $\mathbf{H}_S$ is permutation-equivalent to a subcode of the secret code.

The same vulnerability can also occur when $\mathbf{b}_2 = \mathbf{1} + \mathbf{b}$. In fact, in this case,

$$\mathbf{R} = \begin{bmatrix} \mathbf{a}_1 \\ \mathbf{a}_2 \end{bmatrix}^T \cdot \begin{bmatrix} \mathbf{b} \\ \mathbf{1} + \mathbf{b} \end{bmatrix} = \mathbf{a}^T \cdot \mathbf{b} + \mathbf{a}_2^T \cdot \mathbf{1} \quad (13)$$

and

$$\mathbf{H} \cdot \mathbf{R}^T = \mathbf{H} \cdot \mathbf{b}^T \cdot \mathbf{a} + \mathbf{H} \cdot \mathbf{1}^T \cdot \mathbf{a}_2. \quad (14)$$

So, when the private code includes the all-one codeword, that is, $\mathbf{H} \cdot \mathbf{1}^T = \mathbf{0}$, it results $\mathbf{H} \cdot \mathbf{R}^T = \mathbf{H} \cdot \mathbf{b}^T \cdot \mathbf{a}$ and a vulnerable subcode is still defined by $\mathbf{H}_S$ as in (12). For this reason, when $\mathbf{R}$ is defined as in (13), codes including the all-one codeword cannot be used as secret codes. For example, when an RS code defined over $\mathbb{F}_q$ having length $n = q - 1$ is used, the all-one codeword is always present. Shorter lengths should be considered in order to avoid the presence of the all-one codeword.

When an RS code is used and one of its subcodes is exposed (except for a permutation), an opponent could implement an attack of the type described in [20]. It is possible to verify that, for practical choices of the system parameters, the subcode defined by $\mathbf{H}_S$ given by (12) is always weak against such an attack.

A similar situation occurs if LDPC codes are used as private codes, since low weight codewords could be searched in the dual of the subcode defined by $\mathbf{H}_S$, so revealing some rows of $\mathbf{H}$ (though permuted). Moreover, the existence of low weight codewords in the dual of a subcode of the public code could be dangerous for the system security even when $\mathbf{H}_S$ is not available to an attacker,

since such codewords could still be searched in the dual of the public code. So, when dealing with LDPC codes, it is always recommended to define $\mathbf{T}$ as a sum of permutation matrices (that is, to fix $m > 1$) in order to avoid the existence of codewords with low weight in the dual of the public code [1].

In the following subsections we propose two implementations of the cryptosystem that avoid the subcode vulnerability. We describe them by making reference to the Niederreiter version of the cryptosystem, but they can also be applied to its McEliece version.

3.2 First implementation

A first solution to overcome the subcode vulnerability consists in maintaining $\mathbf{a}_1 = \mathbf{a}$ and $\mathbf{a}_2 = \mathbf{0}$, but hiding the constraint vector $\mathbf{a}$. This obviously would also eliminate the need of selecting the intentional error vectors according to condition (4).

We refer to the Niederreiter version of the cryptosystem and we fix, for simplicity, $z = 1$, but the same arguments can easily be extended to the general case $1 \leq z < n$. Let us suppose that $\mathbf{a}$ is private and that the error vector $\mathbf{e}$ generated by Alice is such that $\mathbf{a} \cdot \mathbf{e}^T = \gamma$, with $\gamma \in \mathbb{F}_q$. It follows that

$$\mathbf{R}^T \cdot \mathbf{e}^T = \gamma \mathbf{b}^T \quad (15)$$

and

$$\mathbf{x}' = \mathbf{S} \cdot \mathbf{x} = \gamma \mathbf{H} \cdot \mathbf{b}^T + \mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{e}^T. \quad (16)$$

In this case, Bob can guess that the value of γ is γ_B and compute

$$\begin{aligned} \mathbf{x}'' &= \mathbf{x}' - \gamma_B \mathbf{H} \cdot \mathbf{b}^T \\ &= (\gamma - \gamma_B) \mathbf{H} \cdot \mathbf{b}^T + \mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{e}^T. \end{aligned} \quad (17)$$

So, if $\gamma_B = \gamma$, Bob obtains $\mathbf{x}'' = \mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{e}^T$. In such a case, he can recover $\mathbf{e}$ through syndrome decoding, check its weight and verify that $\mathbf{a} \cdot \mathbf{e}^T = \gamma_B$. Otherwise, it is $\gamma_B \neq \gamma$ and, supposing that $\mathbf{b}$ is not a valid codeword, syndrome decoding fails or returns an error vector $\mathbf{e}' \neq \mathbf{e}$. This latter case is extremely rare, as shown below, and can also be identified by Bob by checking the weight of $\mathbf{e}'$ and the value of $\mathbf{a} \cdot \mathbf{e}'^T$. So, by iterating the procedure, that is, changing the value of γ_B , Bob is able to find the right γ .

The probability of finding a correctable syndrome $\mathbf{e}'$, for $\gamma_B \neq \gamma$, is very low. In fact, since $\mathbf{b}$ is randomly chosen, when $\gamma_B \neq \gamma$ we can suppose that the vector $(\gamma - \gamma_B) \mathbf{H} \cdot \mathbf{b}^T$ is a random $r \times 1$ vector over $\mathbb{F}_q$. The total number of correctable syndromes is $\sum_{i=1}^t \binom{n}{i} (q-1)^i$, while the total number of random $r \times 1$ vectors is q^r . So, the probability of obtaining a correctable syndrome is:

$$P_e = \frac{\sum_{i=1}^t \binom{n}{i} (q-1)^i}{q^r}. \quad (18)$$

The value of P_e , for practical choices of the system parameters, is very low. For example, by considering the set of parameters used in the original McEliece cryptosystem, that is, $q = 2$, $n = 1024$, $k = 524$, $t = 50$, it results $P_e \approx 10^{-65}$.

In concluding this subsection, we notice that, by using such an implementation, the complexity of the decryption stage is increased, on average, by a factor $\leq (q+1)/2$ with respect to the classical Niederreiter implementation. In fact, the average number of decryption attempts needed by Bob becomes $(q+1)/2$. However, some steps of the decryption procedure do not need to be repeated; so, an increase in the decryption complexity by a factor $(q+1)/2$ corresponds to a pessimistic estimate.

3.3 Second implementation

A second solution to the subcode vulnerability is to adopt the choice $\mathbf{a} = \mathbf{a}_1 + \mathbf{a}_2$, $\mathbf{b}_2 = \mathbf{1} + \mathbf{b}$ and to preserve condition (4), that implies, for Alice, the need to perform a selection of the error vectors. In this case, according to (5):

$$\mathbf{R}^T \cdot \mathbf{e}^T = \mathbf{1}^T \cdot \mathbf{a}_2 \cdot \mathbf{e}^T. \quad (19)$$

If we fix, for simplicity, $z = 1$ (but the same arguments can easily be extended to the general case $1 \leq z < n$) and suppose to work over $\mathbb{F}_q$, the possible values of $\alpha = \mathbf{a}_2 \cdot \mathbf{e}^T$ are, obviously, q . So, Bob needs to make up to q guesses on the value of α .

First, Bob computes $\mathbf{x}' = \mathbf{S} \cdot \mathbf{x} = \mathbf{H} \cdot (\mathbf{R} + \mathbf{T})^T \cdot \mathbf{e}^T$. By using (19), we have:

$$\mathbf{x}' = \mathbf{H} \cdot \mathbf{1}^T \cdot \alpha + \mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{e}^T. \quad (20)$$

We observe that, if the secret code included the all-one codeword, then $\mathbf{H} \cdot \mathbf{1}^T = \mathbf{0}$ and Bob would not need to guess the value of α . However, in this version of the cryptosystem, the use of codes including the all-one codeword is prevented by the subcode vulnerability, as shown in Section 3.1, so this facilitation cannot be exploited. Instead, Bob needs to make a first guess by supposing $\alpha = \alpha_B$ and to calculate

$$\mathbf{x}''_{\alpha_B} = \mathbf{x}' - \mathbf{H} \cdot \mathbf{1}^T \cdot \alpha_B = \mathbf{H} \cdot \mathbf{1}^T \cdot (\alpha - \alpha_B) + \mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{e}^T. \quad (21)$$

If $\alpha_B = \alpha$, then $\mathbf{x}''_{\alpha_B} = \mathbf{H} \cdot \mathbf{T}^T \cdot \mathbf{e}^T$; therefore, Bob can recover $\mathbf{e}$ through syndrome decoding, check its weight and verify that $\mathbf{a}_2 \cdot \mathbf{e}^T = \alpha_B$. Otherwise, the application of syndrome decoding on $\mathbf{x}''_{\alpha_B}$ results in a decoding failure or in obtaining $\mathbf{e}' \neq \mathbf{e}$, for $\alpha_B \neq \alpha$. As for the first implementation, in this case the probability of obtaining a correctable syndrome $\mathbf{e}'$ is very small; so, when $\alpha_B \neq \alpha$, the decoder will end up reporting failure in most cases.

Also in this case, the average number of decryption attempts needed by Bob is $(q+1)/2$, and the decryption complexity increases by a factor $\leq (q+1)/2$.

Concerning the subcode vulnerability, by using $\mathbf{a}_1 \neq \mathbf{a}$ and $\mathbf{a}_2 \neq \mathbf{a}$, the matrix $\mathbf{H}_S$ as in (12) no longer defines a subcode permutation-equivalent to a subcode of the secret code. So, provided that the private code does not include the all-one codeword (for the reasons explained in Section 3.1), the subcode vulnerability is eliminated.

Note that an attacker could try to sum two rows of $\mathbf{H}'$, hoping that one of them corresponds to a copy of the vector $\mathbf{a}_1$ in $\mathbf{R}$ and the other to a copy of

the vector $\mathbf{a}_2$, so that the sum of the two rows might still contain the vector $\mathbf{a}$. If he were able to select only those sums of this type, then he might be able to find a weak subcode. This appears to be a hard task for the following reasons. If he adds one row with all the other rows, he would get, on average, only $r/2 = (n - k)/2$ rows containing the vector $\mathbf{a}$, while the other sums would contain $2\mathbf{a}_1$ or $2\mathbf{a}_2$; even if he were able to select the rows corresponding to $\mathbf{a}$, the dimension of the subcode would not be large enough for a feasible attack [9], [20]. Furthermore, effectively obtaining $\mathbf{a}$ in the sum of two rows also depends on how $\mathbf{H}$ is built, i.e. it may occur only if some special relations between elements of $\mathbf{H}$ are satisfied. Lastly, to sum pairs of rows would also imply to sum pairs of rows of $\mathbf{T}^T$; so, their (very low) weight would be doubled with a very high probability, making decoding harder.

For these reasons, it seems not easy to devise a further vulnerability for the subcode that may allow to mount an attack against this implementation.

3.4 Choice of $\mathbf{Q}$

Also the choice of the matrix $\mathbf{Q}$ can show some critical aspects. Let us focus on the binary case ($q = 2$) and consider a particular instance of the first implementation, in which the matrix $\mathbf{Q}$ is obtained as

$$\mathbf{Q}_1 = \mathbf{R} + \mathbf{P}_1, \quad (22)$$

with $\mathbf{P}_1$ being a permutation matrix and

$$\mathbf{R} = \mathbf{a}^T \cdot \mathbf{b} = \begin{bmatrix} a_1 & a_2 & \cdots & a_n \end{bmatrix}^T \cdot \begin{bmatrix} b_1 & b_2 & \cdots & b_n \end{bmatrix}, \quad (23)$$

where $\mathbf{a}$ and $\mathbf{b}$ are two random vectors over $\mathbb{F}_2$.

In the choice of $\mathbf{Q}_1$ it is important to avoid some special cases which could allow an attacker to derive a code that is permutation-equivalent to the secret one, thus bringing security back to that of the classical McEliece system.

Let us suppose that the j -th element of $\mathbf{b}$ is zero and that $\mathbf{P}_1$ has a symbol 1 at position (i, j) . In this case, the j -th column of $\mathbf{Q}_1$ is null, except for its element at row i . Since $\mathbf{Q}_1^{-1} = \hat{\mathbf{Q}}/|\mathbf{Q}|$, where $\hat{\mathbf{Q}}$ is the adjoint matrix and $|\mathbf{Q}|$ is the determinant of $\mathbf{Q}_1$, it follows from the definition of $\hat{\mathbf{Q}}$ that the i -th column of $\mathbf{Q}_1^{-1}$ is null, except for its element at row j . So, the i -th column of $\mathbf{Q}_1^{-1}$ has the effect of a column permutation, like in the original McEliece cryptosystem.

In order to avoid such a possible flaw, we impose that all the elements of $\mathbf{b}$ are non-zero. If we limit to the binary case, this imposes that $\mathbf{b}$ is the all-one vector. However, in such a case, further issues exist in the design of $\mathbf{Q}$. For example, let us consider $\mathbf{a}$ as an all-one vector too, so that $\mathbf{R} = \mathbf{1}$. A valid parity-check matrix for the public code is:

$$\mathbf{H}' = \mathbf{H} \cdot \mathbf{Q}^T, \quad (24)$$

where $\mathbf{H}$ is the parity-check matrix of the private code. In the special case of $\mathbf{Q}_1 = \mathbf{1} + \mathbf{P}_1$, we have $\mathbf{H}' = \mathbf{H} \cdot \mathbf{1} + \mathbf{H} \cdot \mathbf{P}_1^T$. By assuming a regular $\mathbf{H}$ (i.e. with constant row and column weights), two cases are possible:

- If the rows of $\mathbf{H}$ have even weight, $\mathbf{H} \cdot \mathbf{1} = \mathbf{0}$ and $\mathbf{H}' = \mathbf{H} \cdot \mathbf{P}_1^T$.
- If the rows of $\mathbf{H}$ have odd weight, $\mathbf{H} \cdot \mathbf{1} = \mathbf{1}$ and $\mathbf{H}' = \mathbf{1} + \mathbf{H} \cdot \mathbf{P}_1^T$.

In both cases, the public code has a parity-check matrix that is simply a permuted version of that of the secret code (or its complementary). This reduces the security to that of the original McEliece cryptosystem, that discloses a permuted version of the secret code. Such a security level is not sufficient when adopting, for example, LDPC codes, since the permuted version of the secret matrix $\mathbf{H}$ can be attacked by searching for low weight codewords in the dual of the secret code.

A more general formulation of the flaw follows from the consideration that $\mathbf{Q}_1 = \mathbf{1} + \mathbf{P}_1$ has a very special inverse. First of all, let us consider that $\mathbf{Q}_1$ is invertible only when it has even size. This is obvious since, for odd size, $\mathbf{Q}_1$ has even row/column weight; so, the sum of all its rows is the zero vector. If we restrict ourselves to even size $\mathbf{Q}_1$ matrices, it is easy to show that their inverse has the form $\mathbf{Q}_1^{-1} = \mathbf{1} + \mathbf{P}_1^T$, due to the property of permutation matrices (as orthogonal matrices) to have their inverse coincident with the transpose.

So, $\mathbf{Q}_1^{-1}$ has the same form of $\mathbf{Q}_1$ and, as in the case of $\mathbf{H}$, disclosing $\mathbf{G}' = \mathbf{S}^{-1}\mathbf{G}\mathbf{Q}_1^{-1}$ might imply disclosing a generator matrix of a permuted version of the secret code or its complementary (depending on the parity of its row weight). Therefore, the form $\mathbf{Q}_1 = \mathbf{1} + \mathbf{P}_1$ might reduce the security to that of the permutation used in the original McEliece cryptosystem.

Based on these considerations, one could think that adopting a vector $\mathbf{a}$ different from the all-one vector could avoid the flaw. However, by considering again that $\mathbf{Q}_1^{-1} = \widehat{\mathbf{Q}}/|\mathbf{Q}|$, it is easy to verify that a weight-1 row in $\mathbf{Q}_1$ produces a weight-1 row in $\mathbf{Q}_1^{-1}$ and a weight- $(n-1)$ row in $\mathbf{Q}_1$ produces a weight- $(n-1)$ row in $\mathbf{Q}_1^{-1}$. It follows that $\mathbf{Q}_1^{-1}$ contains couples of columns having Hamming distance 2. Since their sum is a weight-2 vector, the sum of the corresponding columns of the public matrix results in the sum of two columns of $\mathbf{S}^{-1}\mathbf{G}$. Starting from this fact, an attacker could try to solve a system of linear equations with the aim of obtaining a permutation-equivalent representation of the secret code, at least for the existing distance-2 column pairs.

So, our conclusion concerning the binary case is that the choice of $\mathbf{Q}$ as in (22) and (23) should be avoided. A safer $\mathbf{Q}$ is obtained by considering $z > 1$ and more than one permutation matrix (i.e. $m > 1$). This obviously has the drawback of requiring codes with increased error correction capability.

4 Comparison with other variants of the McEliece cryptosystem

The main difference between the proposed cryptosystem and many other variants of the McEliece cryptosystem consists in the way the secret generator matrix is disguised into the public one, that is, by using a more general transformation matrix in the place of the permutation matrix.

Other proposals for increasing key security have been made in the past, such as using a distortion matrix together with rank codes in the GPT cryptosystem [5] and exploiting the properties of subcodes in variants of the McEliece and the GPT cryptosystems [2]. Unfortunately, cryptanalysis has shown that such approaches exhibit security flaws [14], [20].

The idea of using a rank-1 matrix with the structure (23) can be found in [6]. However, such a matrix was added to the secret matrix (rather than multiplied by it) and no selection of the error vectors was performed, so that a completely different solution was implemented.

Instead, the idea of replacing the permutation in the McEliece cryptosystem with a more general transformation matrix is already present in the variant of the GPT cryptosystem adopting a column scrambler [13], [17] and in cryptosystems based on full decoding [7, sec. 8.3]. These proposals are shortly examined next.

4.1 Comparison with the modified GPT cryptosystem

The original GPT cryptosystem has been the object of Gibson’s attack. To counter such an attack, in [13] a variant including a column scrambler in place of the permutation matrix has been proposed.

Apart from the code extension and the inclusion of an additive distortion matrix, in the modified GPT cryptosystem the public generator matrix is obtained through right-multiplication by a non-singular matrix that is not necessarily a permutation matrix. So, in principle, it is the same idea of using a more general transformation matrix as in the proposed cryptosystem. However, in order to preserve the ability to correct the intentional error vectors, the GPT cryptosystem works in the rank metric domain and adopts rank distance codes, as Gabidulin codes.

Unfortunately, the properties of Gabidulin codes make it possible to exploit the effect of the Frobenius automorphism on the public generator matrix in order to mount a polynomial-time attack [14]. Recently, it has been shown that this attack can be avoided [17], but the cryptosystem still needs to work with rank distance codes. Differently from the GPT cryptosystem, the proposed solution is able to exploit Hamming distance codes, that are more widespread than rank distance codes, can be chosen to have convenient properties or structure, like RS codes, and may take advantage of many efficient codec implementations that are already available.

4.2 Comparison with full-decoding cryptosystems

The main idea behind full-decoding cryptosystems in [7] is to let the intentional error vectors have any arbitrary weight. This way, an attacker would be forced to try full-decoding of the public code, that is known to be a NP-complete task. Obviously, the legitimate receiver must be able to decode any intentional error vector with reasonable complexity; so, the problem of full decoding must be transformed from a one-way function to a trapdoor function. For this purpose,

the main idea is to use a transformation that maps a set of error vectors with weight $\leq t$ into a set of arbitrary weight intentional error vectors.

If this transformation is represented by the $n \times n$ matrix $\mathbf{M}$, the public code (as proposed first in [7]) would be $\mathbf{G}' = \mathbf{G} \cdot \mathbf{M}$. The basic point for obtaining a trapdoor function is to make Alice use only those error vectors that can be expressed as $\mathbf{e}' = \mathbf{e} \cdot \mathbf{M}$, where $\mathbf{e}$ is a weight- t error vector. This way, when Bob uses the inverse of the secret matrix $\mathbf{M}$ to invert the transformation, he re-maps each arbitrary weight error vector into a correctable error vector. Unauthorized users would instead be forced to try full-decoding over arbitrary weight error vectors; so, the trapdoor is obtained.

The set of intentional error vectors used in full-decoding cryptosystems is not the set (or a subset) of the correctable error vectors, as in the proposed cryptosystem, but a transformed version of it. In fact, the purpose of full-decoding cryptosystems is to increase the security level with respect to the McEliece cryptosystem by relying on a problem that is harder to solve. In order to exploit the full-decoding problem, Alice must use for encryption only those error vectors that can be anti-transformed into correctable error vectors. So, some information on the transformation used to originate them must be disclosed. A solution is that the first $p < n$ rows of $\mathbf{M}$ are made public [7]. However, it has been proved that, this way, the security reduces to that of the original McEliece cryptosystem, and an attacker does not have to attempt full-decoding, but only normal decoding.

Further variants aim at better hiding the secret transformation matrix in its disclosed version [7]. In the last variant, a generator matrix of a maximum distance- t anticode is used to hide the secret transformation. This way, after inverting the secret transformation, the error vector remains correctable for the legitimate receiver. To our knowledge, the latter version has never been proved to be insecure nor to reduce to the same problem of the original McEliece cryptosystem. However, the construction based on anticodes seems unpractical.

Differently from full-decoding cryptosystems, our proposal still relies on the same problem as the original McEliece cryptosystem (that is, normal decoding); so, no transformation is performed over the correctable random error vectors, but we need, at most, only a selection of them. For this reason, the information leakage on the secret transformation matrix that is needed in the proposed cryptosystem is considerably smaller with respect to what happens in full-decoding cryptosystems.

5 Attacks against the proposed cryptosystem

A first concern about the proposed cryptosystem is to verify that it is actually able to provide increased key security, with respect to previous variants of the McEliece cryptosystem, in such a way as to allow the use of widespread families of codes (as RS and Generalized RS codes) without incurring in the attacks that have prevented their use up to now.

From the comparison with the variants described in Sections 4.1 and 4.2,

we infer that previous attacks targeted to those cryptosystems do not succeed against the proposed one, due to the differences in the family of codes used and in the information leakage on the secret transformation. Concerning the latter point, we observe that, even if the whole matrix $\mathbf{R}$ (and not only the vector $\mathbf{a}$) was public, an attacker would not gain much information. In fact, in this case, he could compute $\mathbf{x} \cdot \mathbf{R} = \mathbf{u} \cdot \mathbf{G}' \cdot \mathbf{R}$. However, for the choices of the parameters we consider, $\mathbf{R}$ has rank $\ll n$, so $\mathbf{G}' \cdot \mathbf{R}$ is not invertible. Moreover, multiplication by $\mathbf{G}' \cdot \mathbf{R}$ only provides a small dimension syndrome of $\mathbf{u}$, whose decoding is known to be a hard problem [3].

The most powerful attack procedures against our proposed solution are those techniques that attempt information set decoding (ISD) on the public code; so we estimate the security level of the proposed cryptosystem against this kind of attacks. Actually, there is no guarantee that the public code, defined through the generator matrix (6) or, equivalently, the parity-check matrix (9), maintains the same minimum distance and error correction capability of the secret code. Since the private code is already a very good code, and the transformation matrix is randomly chosen, the public code will most probably be worse than the private one. So, in estimating the security level as the work factor of ISD attacks, we make the pessimistic assumption that the public code is still able to correct all intentional errors.

5.1 ISD attacks

In [4] the authors have proposed some smart speedup techniques to reduce the Stern algorithm work factor (WF) over the binary field, this way obtaining a theoretical WF close to 2^{60} . Their attack was implemented on a big cluster of computers that was able to break the McEliece cryptosystem with original parameters ($n = 1024$, $k = 524$, $t = 50$). As a consequence, the authors have proposed some new set of system parameters in order to increase the security level. The information set decoding attack is not polynomial in the code dimension, since it aims at decoding a random linear code without exploiting any structural property (even if present) and this task is notoriously non-polynomial. One of the biggest improvements presented in [4] is a smart way to find k independent columns in the public generator matrix at each iteration without performing Gaussian reduction on all such columns. A further improvement consists in the pre-computation of the sum of some rows during the reduction.

In [16], Peters points out that these speedups are efficient on very small fields. As it results from the table available in [15], for $q > 16$ the maximum values of the speedup parameters are $c = 2$, $r = 1$, where c represents the number of columns to be changed in the case an iteration fails and r is the number of rows in a single pre-sum (1 means no speedup). So, for large fields, these speedups are not relevant and the algorithm is quite similar to Stern's one. The difference relies on guessing not only p error positions but also p error values in the k independent columns, due to the field cardinality. Finiasz and Sendrier have proposed a further improvement that could yield a slight modification in the WF, resulting in a maximum increase of 2^6 or a maximum decrease close to

2^3 .

In Table 1 we report some values of the WF when using RS codes in the variant of the McEliece cryptosystem we propose. They were computed through the PARI/GP script available in [15], that allows the estimation of the security level, although it is not extremely accurate (it can be about 4-8 times higher than the actual value). The reported WF values are the lowest ones obtained for each set of parameters. We observe from Table 1 that, in order to reach a satisfactory level of security (that is, $WF \geq 2^{80}$) we need to adopt RS codes defined on $\mathbb{F}_{256}$ or more. Based on Table 1, we can compare the proposed cryptosystem with the instances of the McEliece system presented in [4].

5.1.1 Example 1

To reach $WF > 2^{80}$, the (1632, 1269) Goppa code is suggested, resulting in a public-key size of 460647 bits (obtained by storing the non-systematic part of $\mathbf{H}$, as in the Niederreiter cryptosystem).

With the new variant, we can consider the RS code with $n = 255$, $k = 195$, $t = 30$, having an estimated $WF \approx 2^{86.06}$ and an actual $WF \approx 2^{84.18}$ (found through the C program available in [15]). We can consider the Niederreiter version of the first implementation (see Section 3.2), and use $\mathbf{H}''$, defined by (11), having elements over $\mathbb{F}_{256}$, as the public key.

This way, we need to store only the last k columns of $\mathbf{H}''$, so obtaining a public key size of 93600 bits, that is about 80% less than in the revised McEliece cryptosystem [4]. If we instead adopt the second implementation (see Section 3.3), we also need to store the 1×255 vector $\mathbf{a}$, with elements over $\mathbb{F}_{256}$. This would increase the public key size by 2040 bits, that is not a significant change.

The security level of the two systems remains comparable when the constraint expressed by $\mathbf{a}$ is imposed on the intentional error vectors of the modified cryptosystem. In fact, as it will be shown in the next subsection, the introduction of each constraint results in a decreased WF for the ISD attack of 2^3 at most.

5.1.2 Example 2

As another example, we can consider the Goppa code suggested in [4] to achieve $WF \geq 2^{128}$, which has $n = 2960$, $k = 2288$, yielding a key length of 1537536 bits.

An RS code with the same rate (0.77), defined over $\mathbb{F}_{512}$, is reported in Table 1 and has $n = 511$, $k = 395$. By considering this code in the Niederreiter version of the first implementation (see Section 3.2), and storing the last k columns of $\mathbf{H}''$, defined by (11), we obtain a public key size of 412380 bits, that is about 73% less than in the revised McEliece cryptosystem.

Moreover, by using the new system, the security level grows up to $2^{158.67}$ (more precisely, it is estimated as $2^{155.89}$ with the C program from [15]). This value remains very high even when we consider the presence of the constraint expressed by $\mathbf{a}$ on the intentional error vectors.

Table 1: Work factor ($\log_2$) of ISD attacks on RS codes.

RS codes with $n = 127$ defined over $\mathbb{F}_{128}$															
Rate	0.75	0.73	0.72	0.70	0.69	0.67	0.65	0.64	0.62	0.61	0.59	0.57	0.56	0.54	0.53
t	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
WF	49.2	50.1	51.0	51.7	52.3	52.8	53.3	53.7	54.0	54.2	54.3	54.4	54.4	54.4	54.2
RS codes with $n = 255$ defined over $\mathbb{F}_{256}$															
Rate	0.81	0.80	0.78	0.76	0.75	0.73	0.72	0.70	0.69	0.67	0.65	0.64	0.62	0.61	0.59
t	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52
WF	79.0	81.6	83.9	86.1	87.9	89.6	91.1	92.4	93.5	94.4	95.2	95.8	96.2	96.5	96.7
RS codes with $n = 511$ defined over $\mathbb{F}_{512}$															
Rate	0.94	0.93	0.91	0.90	0.89	0.88	0.87	0.86	0.84	0.83	0.82	0.81	0.80	0.78	0.77
t	16	19	22	25	28	31	34	37	40	43	46	49	52	55	58
WF	81.3	90.1	98.1	105.6	112.4	118.8	124.7	130.2	135.3	140.0	144.3	148.4	152.1	155.5	158.7

5.2 Exploiting the knowledge on error vectors

It is important to assess whether the constraints that may be imposed on the intentional error vectors in the proposed cryptosystem have any consequences on its security.

For this purpose, a conservative approach consists in considering, in the WF computations, a reduced number of intentional errors, that is, $t' = t - z$. This approach is conservative in the sense that we assume that the attacker exactly knows both the position and the value of z errors, while he actually knows only their values. We can estimate the WF of an ISD attack in this scenario by using the same procedure as in Section 5.1. This has been done in Table 2. As we can observe from the values obtained (and their comparison with those reported in Table 1, corresponding to $z = 0$), we have a WF decrease close to 2^3 when z is increased by 1. So, the security level for the considered parameters does not vary significantly, on condition that the value of z is kept small.

Table 2: Work factor ($\log_2$) of ISD attacks on RS codes with $n = 255$, defined over $\mathbb{F}_{256}$, when $z = 1$ or $z = 2$ constraints are imposed on the error vectors.

Rate	0.81	0.80	0.78	0.76	0.75	0.73	0.72	0.70	0.69	0.67	0.65	0.64	0.62	0.61	0.59
t	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52
WF ($z = 1$)	75.9	78.6	81.1	83.3	85.3	87.0	88.6	90.0	91.2	92.2	93.0	93.7	94.2	94.6	94.8
WF ($z = 2$)	72.8	75.6	78.2	80.5	82.6	84.5	86.1	87.6	88.9	89.9	90.9	91.6	92.2	92.6	92.9

6 Conclusion

We have introduced a variant of the McEliece cryptosystem that, by replacing the secret permutation matrix with a more general transformation matrix, is able to avoid that the public code is permutation-equivalent to the secret code. This allows to prevent attacks against classical families of codes, as RS codes, and to reconsider them as possible good candidates in this framework.

We have proposed some practical implementations of the new cryptosystem, by considering both its McEliece and Niederreiter variants, and we have addressed some important issues that may influence their design.

We have also assessed the security level of the proposed cryptosystem by considering up-to-date attack procedures, and we have compared it with the classical McEliece cryptosystem and the Niederreiter variant. Our results show that the proposed solution, by exploiting RS codes, is able to guarantee an increased security level and, at the same time, a considerable reduction in the public key size.

Acknowledgment

The authors would like to thank Jean-Pierre Tillich and Ayoub Otmani for having pointed out the subcode vulnerability for the private code.

References

- [1] Baldi, M., Bodrato, M., Chiaraluce, F.: A new analysis of the McEliece cryptosystem based on QC-LDPC codes. In: Security and Cryptography for Networks, Lecture Notes in Computer Science, vol. 5229, pp. 246–262. Springer Berlin / Heidelberg (2008)
- [2] Berger, T.P., Loidreau, P.: How to mask the structure of codes for a cryptographic use. Designs, Codes and Cryptography 35, 63–79 (2005)
- [3] Berlekamp, E., McEliece, R., van Tilborg, H.: On the inherent intractability of certain coding problems. IEEE Trans. Inform. Theory 24(3), 384–386 (May 1978)
- [4] Bernstein, D.J., Lange, T., Peters, C.: Attacking and defending the McEliece cryptosystem. In: Post-Quantum Cryptography, Lecture Notes in Computer Science, vol. 5299, pp. 31–46. Springer Berlin / Heidelberg (2008)
- [5] Gabidulin, E.M., Paramonov, A.V., Tretjakov, O.V.: Ideals over a non-commutative ring and their application in cryptography. D. W. Davies, Ed., Advances in Cryptology - EUROCRYPT 91, Lecture Notes in Computer Science 547, Springer Verlag (1991)
- [6] Gabidulin, E.M., Kjelsen, O.: How to avoid the Sidel'nikov-Shestakov attack. In: Error Control, Cryptology, and Speech Compression, Lecture Notes in Computer Science, vol. 829, pp. 25–32. Springer Berlin / Heidelberg (1994)
- [7] Kabatiansky, G., Krouk, E., Semenov, S.: Error Correcting Coding and Security for Data Networks: Analysis of the Superchannel Concept. John Wiley & Sons (2005)

- [8] McEliece, R.J.: A public-key cryptosystem based on algebraic coding theory. DSN Progress Report pp. 114–116 (1978)
- [9] Minder, L.: Cryptography based on error correcting codes. Ph.D. thesis, École Polytechnique Fédérale de Lausanne (2007)
- [10] Monico, C., Rosenthal, J., Shokrollahi, A.: Using low density parity check codes in the McEliece cryptosystem. In: Proc. IEEE International Symposium on Information Theory (ISIT 2000). p. 215. Sorrento, Italy (Jun 2000)
- [11] Niederreiter, H.: Knapsack-type cryptosystems and algebraic coding theory. Probl. Contr. and Inform. Theory 15, 159–166 (1986)
- [12] Otmani, A., Tillich, J.P., Dallot, L.: Cryptanalysis of two McEliece cryptosystems based on quasi-cyclic codes. In: Proc. First International Conference on Symbolic Computation and Cryptography (SCC 2008). Beijing, China (Apr 2008)
- [13] Ourivski, A., Gabidulin, E.M.: Column scrambler for the GPT cryptosystem. Discrete Applied Mathematics 128, 207–221 (2003)
- [14] Overbeck, R.: Structural attacks for public key cryptosystems based on Gabidulin codes. Journal of Cryptology 21(2), 280–301 (2008)
- [15] Peters, C.: (2010), <http://www.win.tue.nl/~cpeters/isdfq.html>
- [16] Peters, C.: Information-set decoding for linear codes over $\mathbb{F}_q$. In: Sendrier, N. (ed.) Post-Quantum Cryptography, Lecture Notes in Computer Science, vol. 6061, pp. 81–94. Springer Berlin / Heidelberg (2010)
- [17] Rashwan, H., Gabidulin, E.M., Honary, B.: Security of the GPT cryptosystem and its applications to cryptography. Security Comm. Networks (2010)
- [18] Sidel’nikov, V. M., Shestakov, S. O.: On insecurity of cryptosystems based on generalized Reed-Solomon codes, Discrete Mathematics and Applications 2 (4), 439–444 (1992)
- [19] Umana, V.G., Leander, G.: Practical key recovery attacks on two McEliece variants. In: Cid, C., Faugere, J.C. (eds.) Proc. 2nd Int. Conf. on Symbolic Computation and Cryptography. pp. 27–44. Egham, UK (Jun 2010)
- [20] Wieschebrink, C.: Cryptanalysis of the Niederreiter public key scheme based on GRS subcodes. In: Sendrier, N. (ed.) Post-Quantum Cryptography: PQCrypto 2010, LNCS, vol. 6061, pp. 61–72. Springer (2010)